


Side mounting top brackets



304 Stainless steel



Polyamide

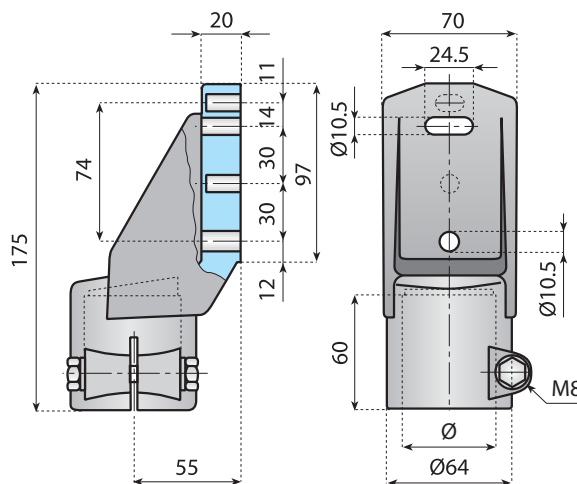

SIDE MOUNTING TOP BRACKET


Material: reinforced polyamide, screw, nut and washers in stainless steel AISI 304.

Note: the bracket can be inclined by 7°. Possibility to use hole centre distance from 60 mm to 72 mm.

To use the hole, break the thickness of the diaphragm.

Packaging: 25 pieces.

Code	For tube Ø
14748	48.3
14744	50.9

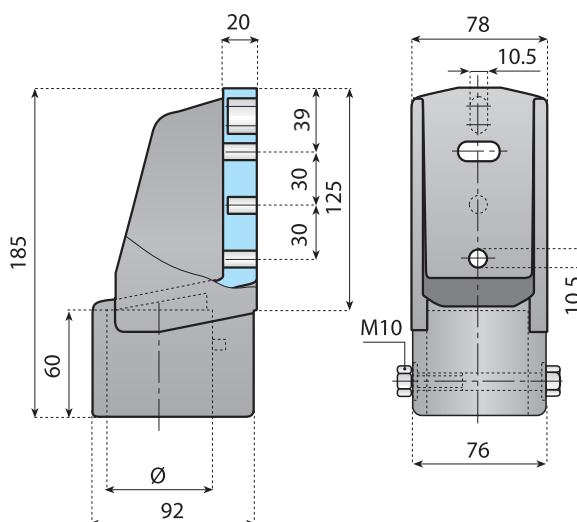

SIDE MOUNTING TOP BRACKET

Material: reinforced polyamide, screw, nut and washers in stainless steel AISI 304.


Note: the bracket can be inclined by 7°. Possibility to use hole centre distance from 60 mm to 85,5 mm.

To use the hole, break the thickness of the diaphragm.

Packaging: 25 pieces.

Code	For tube Ø
14745	60.3

Side mounting bracket

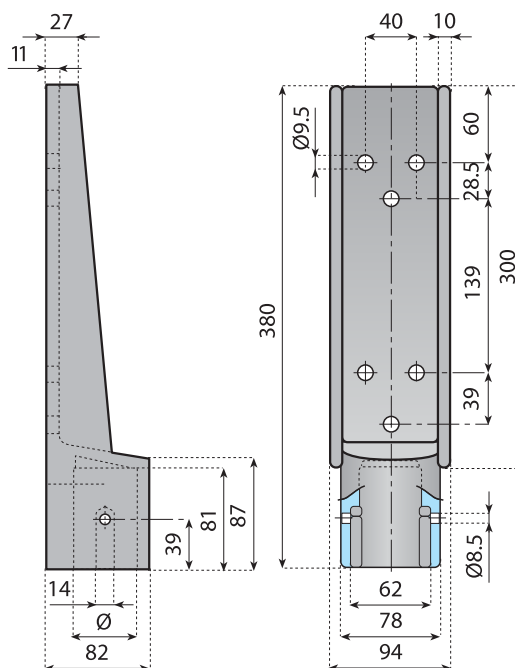

304 Stainless steel




Polyamide

SIDE MOUNTING TOP BRACKET

Material: reinforced polyamide screw nut and washers in stainless steel AISI 304.

Packaging: 25 pieces.

Code	DF For tube Ø
14100	48.3
14101	50.9

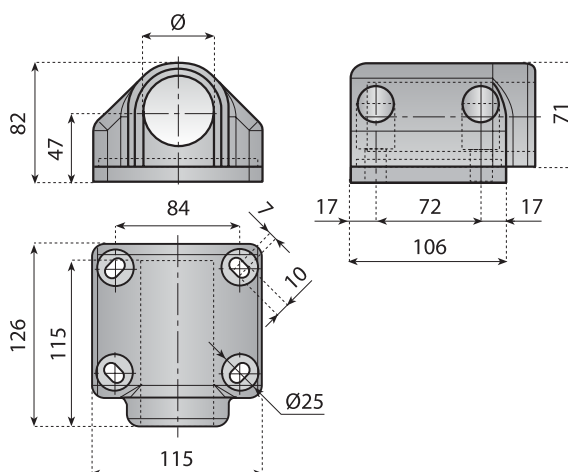

SIDE MOUNTING TOP BRACKET

Material: reinforced polyamide.

Packaging: 25 pieces.

Code	DF For tube Ø
14053	48.3

Side mounting top brackets




SIDE MOUNTING TOP BRACKET
with expansion plug for round
tubes Ø 48.3x1.5 mm

Components: external part in reinforced polyamide.
Conical insert in reinforced polyamide.
Threaded bushing in nickel plated brass.
Bolt and washer in stainless steel.

Note: max recommended tightening torque 2.5 Kgm.

Application: the bracket can be inclined by 30°.

Packaging: 25 pieces.

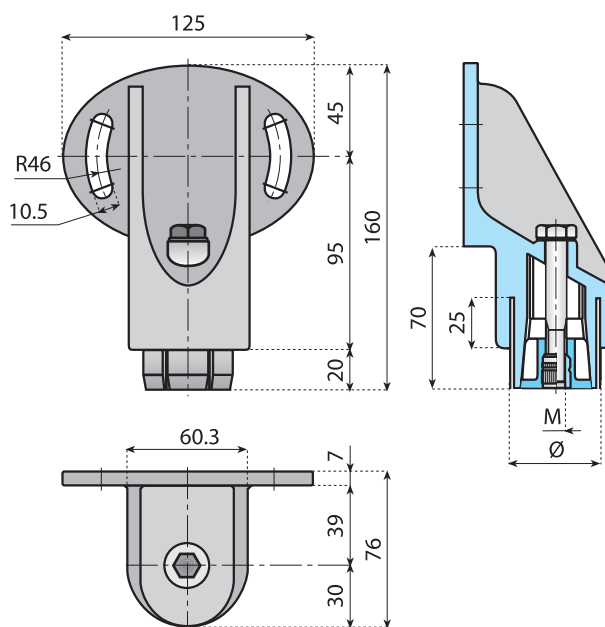

Code	M	For tube Ø
14071	8	48.3
14070	10	48.3
14068	8	50.9
14069	10	50.9



304 Stainless steel



Nickel plated brass



Polyamide




SIDE MOUNTING TOP BRACKET
with expansion plug for square
tubes 40x40x2 mm

Components: external part in reinforced polyamide.
Conical insert in reinforced polyamide.
Threaded bushing in nickel plated brass.
Bolt and washer in stainless steel.

Note: max recommended tightening torque 2.5 Kgm.

Application: the bracket can be inclined by 30°.

Packaging: 25 pieces.

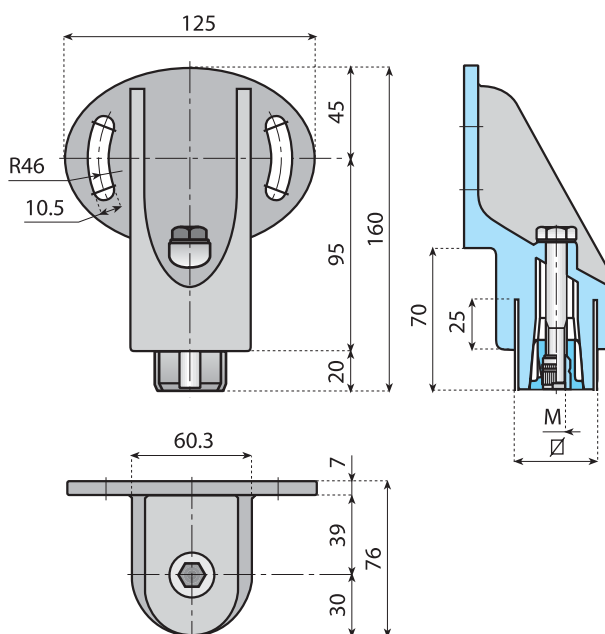

Code	M	For tube ▯
14073	8	40x40
14072	10	40x40


Support heads



304 Stainless steel




Polyamide

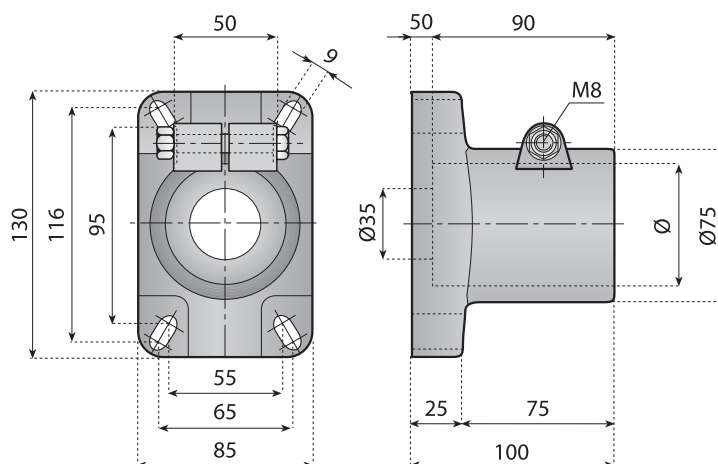

SUPPORT HEAD

Material: reinforced polyamide;
screw, nut and washers in stainless steel AISI 304.
Note: max. recommended tightening torque 2 Kgm.
Packaging: 25 pieces.

Code	For tube Ø
14742	42.4
14741	48.3
14740	50.9
14739	60.3

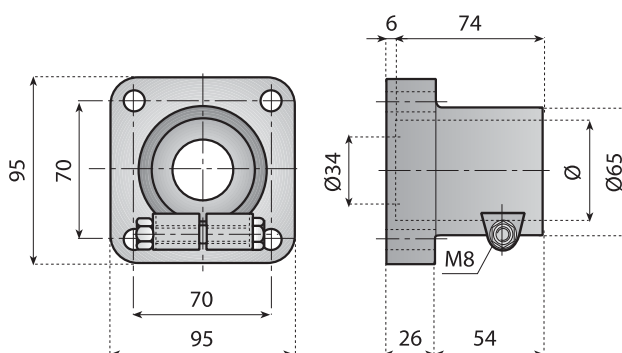


SUPPORT HEAD

Material: reinforced polyamide;
screw, nut and washer in S/S AISI 304.
Note: max recommended tightening torque 2 Kgm.
Packaging: 25 pieces.

Code	For tube Ø
14050	48.3
14051	50.9

Support heads

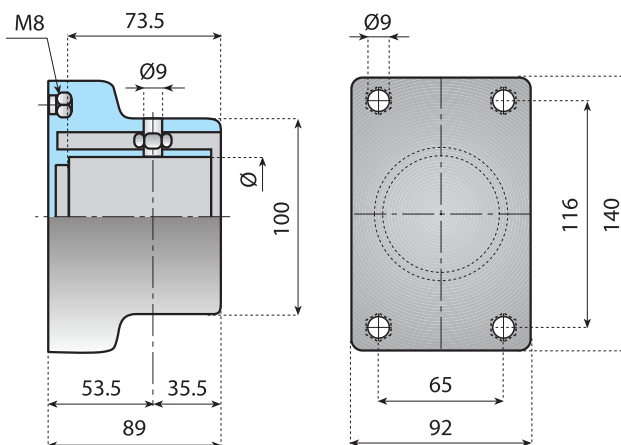

304 Stainless steel



Polyamide

EXTRA SUPPORT HEAD

Material: polyamide, stainless steel bolts.




Colour: black.

Note: max. recommended tightening torque 1.5 Kgm.


Packaging: 25 pieces.

Code

14052

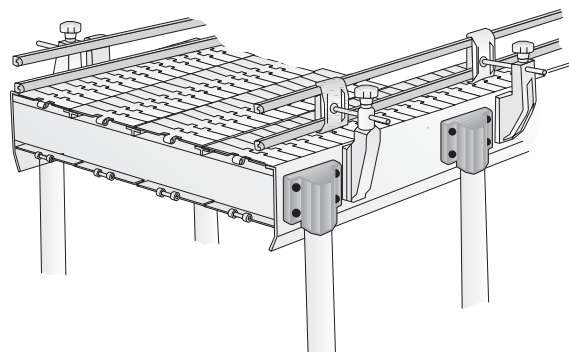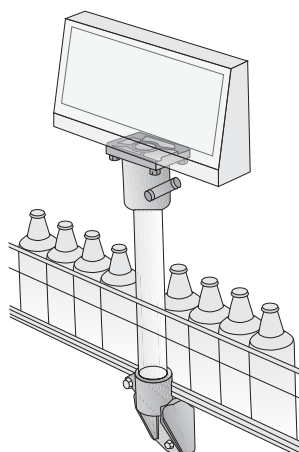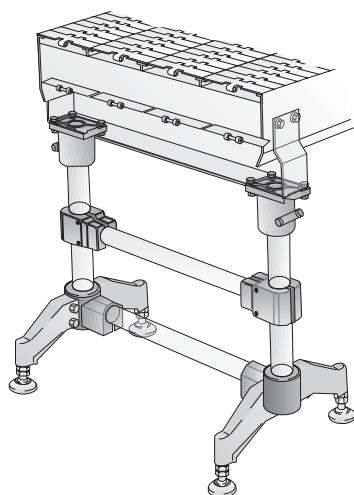

Connecting joints

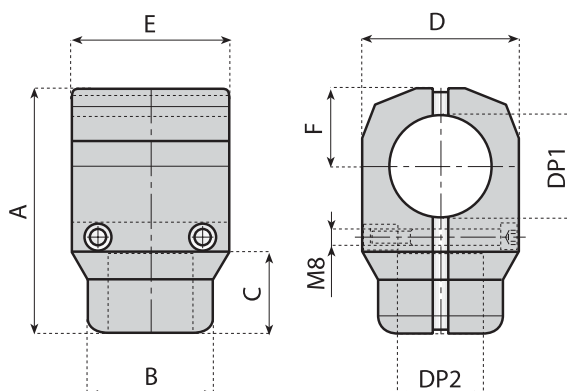

304 Stainless steel



Nickel plated brass



Polyamide


CONNECTING JOINT

Material: reinforced polyamide, screws in stainless steel AISI 304, bushings in nickel plated brass.

Note: max. recommended tightening torque 1.5 Kgm.

Packaging: 25 pieces.

Code	For tubes Ø		A	B	C	D	E	F
	DP1	DP2						
14747	48.3	32	116	57	40	70	74	36
14733	48.3	42.4	122	62	40	78	78	39
14732	50.9	42.4	122	62	40	78	78	39
14746	60.3	42.4	130	130	41	82	82	42.5

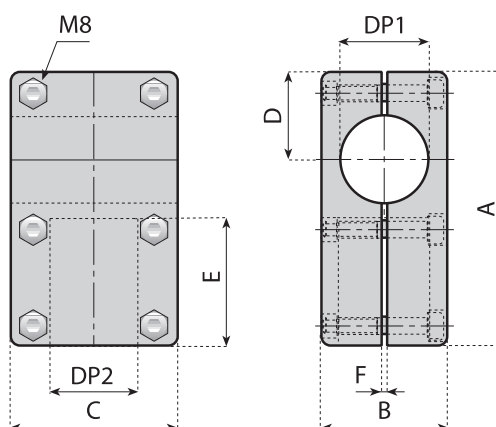

EXTRA RIGID CONNECTING JOINT


Material: reinforced polyamide, screws and nuts in stainless steel AISI 304.

Note: max. recommended tightening torque 1.5 Kgm.

Packaging: 25 pieces.

Code	For tubes Ø		A	B	C	D	E	F
	DP1	DP2						
14729	42.4	42.4	132	60	80	42	60	1.5
14734	48.3	42.4	132	60	80	42	60	1.5
14743	50.9	50.9	142	69	92	47	60	3
14737	60.3	42.4	142	69	92	47	60	3
14738	60.3	60.3	142	69	92	47	60	3

Connecting joints

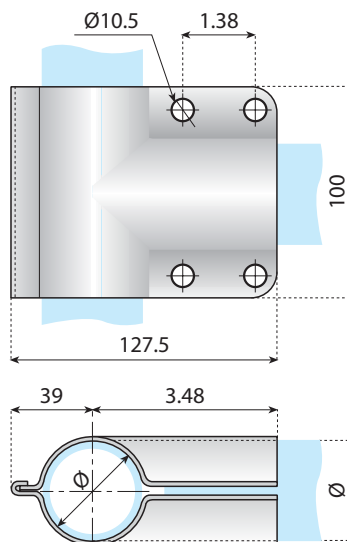

304 Stainless steel

CONNECTING JOINT

Material: stainless steel AISI 304.

Thickness: $S = 2$ mm.


Surface: tumbling finish.

Use: with tubes $\varnothing 48.3$ mm.

Note: the connecting joint is supplied without screws.

Packaging: 25 pieces.

Code	For tube $\varnothing$
13827	48.3

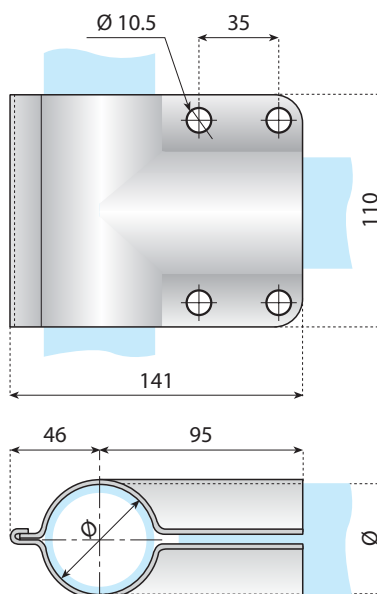

CONNECTING JOINT

Material: stainless steel AISI 304.

Thickness: $S = 2$ mm.


Surface: tumbling finish.

Use: with tubes $\varnothing 60.3$ mm.

Note: the connecting joints supplied without screws.

Packaging: 25 pieces.

Code	For tube $\varnothing$
13828	60.3



CONNECTING JOINT

Material: stainless steel AISI 304.

Thickness: $S = 2.5$ mm.

Surface: tumbling finish.


Use: with tubes $\varnothing 48.3$ mm and flat bar 25x8 mm.

Note: the connecting joints is supplied without screws.

Packaging: 50 pieces.

Code	Flat bar	For tube $\varnothing$
13981	25 x 8	48.3

Connecting joints

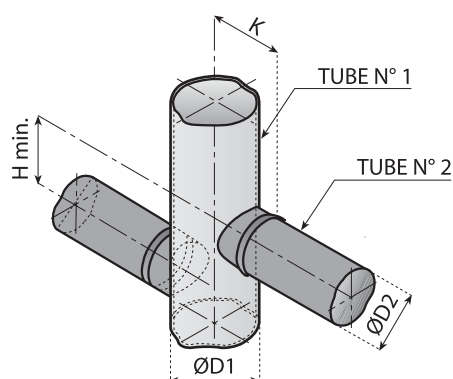

304 Stainless steel



Nickel plated brass



Polyamide



Polyamide

CONNECTING JOINT

Components and material:

- Conical bushing in nickel plated brass.
- Expansion plug in reinforced polyamide.
- Adaptor plug in reinforced polyamide.
- Screw M8x50 in stainless steel.
- Closing cap in polyamide.


Use: these joints connect different tubes at different angles.

Special design provides a simple method of joining tubes for maximum cleanliness.

Note: tube deformation occurs with a tightening torque of 2.5 Kgm thus preventing accidental unscrewing of the plug due to structure vibrations.

Code	Tube N°1			Tube N°2			K	H
	Ext. Ø D1	inch.	Wall S1	Ext. Ø D2	inch.	Wall S2		
14815	38	—	•	38	—	1.5	32	43
14816	42.4	1 1/4	•	38	—	1.5	34.2	43
14817	42.4	1 1/4	•	42.4	1 1/4	1.5	34.2	47
14818	48.3	1 1/2	•	38	—	1.5	37.2	43
14819	48.3	1 1/2	•	42.4	1 1/4	1.5	37.2	47
14821	60.3	2	•	42.4	1 1/4	1.5	43.2	47

• application with any thickness.

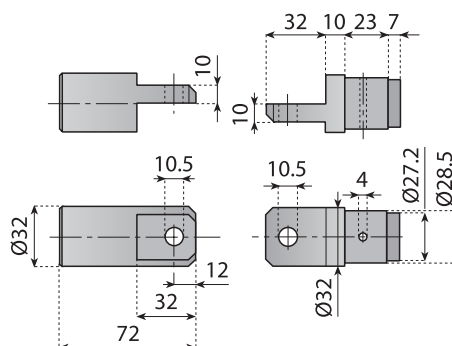

KNUCKLE JOINT FOR TUBE Ø 32 mm

Material: reinforced polyamide; screws and nut is stainless steel AISI 304

Application: with connecting joint code 14747 and tube Ø 32 mm, 1,5 wall.

Supply: assembled.

Packaging: 50 pieces.

Code

14736


Expansion plugs for round tubes



Nickel plated brass



Polyamide

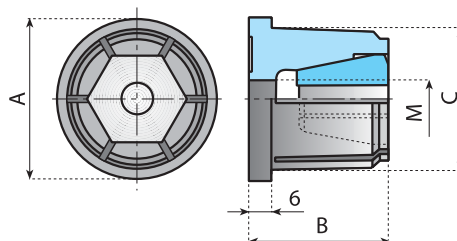

EXPANSION PLUG

Components and material:

External part in reinforced polyamide.

Conical insert available in two materials:

- version in nickel plated brass;
- version in polyamide with nut;

Notes: bolt and washer are not included.


Technical information:

- Version with nickel plated brass insert:
max. load for removal Kgf 420
(static conditions).

- Version with polyamide insert:
max. load for removal Kgf 350
(static conditions).

Packaging: 50 pieces.

Code		Dimensions mm				Tube dimensions		
Version with brass bush	Version with polyamide bush	M	A	B	C	Ext. Ø	Int. Ø	Wall
14001	14003	10	38	41	34.8	38	35	1.5
14002	14004	8	38	41	34.8	38	35	1.5
14749	14005	10	44.5	41	39.2	42.4	39.4	1.5
14753	14006	8	44.5	41	39.2	42.4	39.4	1.5
-	14018	10	48.5	50	44.7	48.3	45.3	1.5
-	14017	8	48.5	50	44.7	48.3	45.3	1.5



EXPANSION PLUG for round tubes

Components:

External part in reinforced polyamide.

Conical insert in nickel plated brass.


Technical information:

Max. load for removal Kgf 300
(static conditions).

Packaging: 100 pieces.

Code	Colour	M	For round tube
14352	Black	8	20 x 1.5
14353	Black	10	20 x 1.5

Expansions plug for square tubes

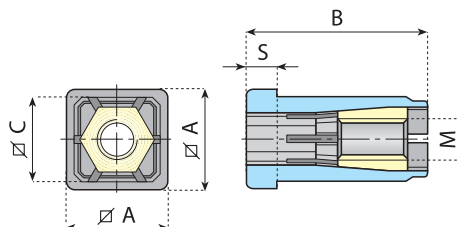

Nickel plated brass



Polyamide

EXPANSION PLUG for square tubes

40x40

20x20

Components and material:

External part in reinforced polyamide.

Conical insert in nickel plated brass with polyamide.

Technical information:

tube 40x40

max. load for removal Kgf 400 (static conditions).

Tube 20x20

max. load for removal Kgf 300 (static conditions).

Supply: assembled.

Packaging: 50 pieces.

Code	Dimensions mm					Tube dimension		
	S	M	A	B	C	Ext.	Int.	Wall
14019	6	8	20x20	36	17	20x20	17	1.5
14020	6	10	20x20	36	17	20x20	17	1.5
14021	6	8	20x20	36	16	20x20	16	2
14022	6	10	20x20	36	16	20x20	16	2
14015	10	8	40x40	57	35.5	40x40	36	2
14016	10	10	40x40	57	35.5	40x40	36	2

Threaded tube ends for round tubes



Nickel plated brass



Polyamide

THREADED TUBE ENDS FOR ROUND TUBES

Material: polyamide, threaded bushing in nickel plated brass.



Packaging: 50 pieces.

Round tubes
Max static load

Ø mm	30	38	42	48	50	60
N	3000	5000	6000	6000	6500	8000



Code	Type	A	B mm	C mm	L mm	S mm	Round tube		
							Ext. Ø mm	Int. Ø mm	Thickness mm
14799	1	M10	30	28.4	35	29	30	28	1
14800	1	M12	30	28.4	35	29	30	28	1
14801	1	M14	30	28.4	35	29	30	28	1
14773	1	M10	38	35.5	46.5	38	38	35	1.5
14752	1	M12	38	35.5	46.5	38	38	35	1.5
14774	1	M14	38	35.5	46.5	38	38	35	1.5
14764	1	M16	38	35.5	46.5	38	38	35	1.5
14775	1	M10	42	39.9	45.5	38	42.4	39.4	1.5
14763	1	M12	42	39.9	45.5	38	42.4	39.4	1.5
14776	1	M14	42	39.9	45.5	38	42.4	39.4	1.5
14750	1	M16	42	39.9	45.5	38	42.4	39.4	1.5
14765	1	M20	42	39.9	45.5	38	42.4	39.4	1.5
14766	1	M12	48	45.8	55	45	48.3	45.3	1.5
14777	1	M14	48	45.8	55	45	48.3	45.3	1.5
14767	1	M16	48	45.8	55	45	48.3	45.3	1.5
14751	1	M20	48	45.8	55	45	48.3	45.3	1.5
14754	1	M12	50	48.4	49	38	50.9	47.9	1.5
14778	1	M14	50	48.4	49	38	50.9	47.9	1.5
14755	1	M16	50	48.4	49	38	50.9	47.9	1.5
14768	1	M20	50	48.4	49	38	50.9	47.9	1.5
14835	2	M14	54	50.5	55	45	54	50	2
14836	2	M16	54	50.5	55	45	54	50	2
14837	2	M20	54	50.5	55	45	54	50	2
14791	2	M16	60	58	50	38	60.3	57.3	1.5
14792	2	M20	60	58	50	38	60.3	57.3	1.5
14793	2	M16	60	57	50	38	60.3	56.3	2
14794	2	M20	60	57	50	38	60.3	56.3	2
14802	2	M16	60	56	50	38	60.3	55.3	2.5
14803	2	M20	60	56	50	38	60.3	55.3	2.5
14804	2	M24	60	56	50	38	60.3	55.3	2.5

FOR FURTHER INFORMATION
ABOUT THIS LINE PLEASE
CONSULT THE PRESSO-LINE
CATALOGUE.



TYPE 1

TYPE 2



STATED LOAD VALUES ARE MEANT FOR STATIC CONDITIONS.
SUCH VALUES HAVE TO BE ADEQUATELY REDUCED
IN PRESENCE OF HIGH FREQUENCY VIBRATIONS
OR DYNAMIC LOADS.
FOR FURTHER INFORMATION CONTACT
OUR TECHNICAL OFFICE.

Threaded tube ends for square tubes



Polyamide



Nickel plated brass

THREADED TUBE ENDS FOR SQUARE TUBES

Material: polyamide, threaded bushing in nickel plated brass.


Packaging: 50 pieces.

Square tubes
Max static load


Ø mm	25	30	35	38	40	50	60
N	5000	5500	5500	6000	6000	10000	12000




FOR FURTHER INFORMATION
ABOUT THIS LINE PLEASE
CONSULT THE PRESSO-LINE
CATALOGUE.



TYPE 1

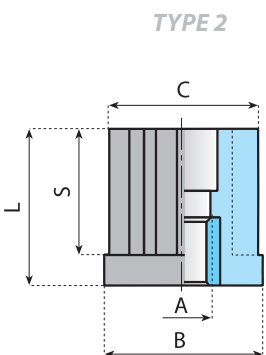


TYPE 2



Code	Type	A	B mm	C mm	L mm	S mm	Ext. Ø mm	Int. Ø mm	Thickness mm
14824	2	M8	25	22.5	30	25	25	22	1.5
14822	2	M10	25	22.5	30	25	25	22	1.5
14823	2	M12	25	22.5	30	25	25	22	1.5
14779	2	M10	30	27.5	33	27	30	27	1.5
14780	2	M12	30	27.5	33	27	30	27	1.5
14781	2	M14	30	27.5	33	27	30	27	1.5
14782	2	M16	30	27.5	33	27	30	27	1.5
14810	2	M10	30	26.5	33	27	30	26	2
14811	2	M12	30	26.5	33	27	30	26	2
14812	2	M14	30	26.5	33	27	30	26	2
14813	2	M16	30	26.5	33	27	30	26	2
14805	1	M10	35	32.5	43	35	35	32	1.5
14806	1	M12	35	32.5	43	35	35	32	1.5
14807	1	M14	35	32.5	43	35	35	32	1.5
14808	1	M16	35	32.5	43	35	35	32	1.5
14809	1	M20	35	32.5	43	35	35	32	1.5
14825	1	M10	35	31.5	43	35	35	31	2
14826	1	M12	35	31.5	43	35	35	31	2
14827	1	M14	35	31.5	43	35	35	31	2
14828	1	M16	35	31.5	43	35	35	31	2
14829	1	M20	35	31.5	43	35	35	31	2
14783	2	M10	38	35.4	43	35	38.1	34.9	1.6
14756	2	M12	38	35.4	43	35	38.1	34.9	1.6
14784	2	M14	38	35.4	43	35	38.1	34.9	1.6
14757	2	M16	38	35.4	43	35	38.1	34.9	1.6
14785	2	M20	38	35.4	43	35	38.1	34.9	1.6
14786	2	M10	38	32.6	43	35	38.1	32.1	3
14758	2	M12	38	32.6	43	35	38.1	32.1	3
14759	2	M14	38	32.6	43	35	38.1	32.1	3
14787	2	M16	38	32.6	43	35	38.1	32.1	3
14788	2	M20	38	32.6	43	35	38.1	32.1	3
14790	2	M10	40	37.5	55	45	40	37	1.5
14769	2	M12	40	37.5	55	45	40	37	1.5
14770	2	M14	40	37.5	55	45	40	37	1.5
14771	2	M16	40	37.5	55	45	40	37	1.5
14772	2	M20	40	37.5	55	45	40	37	1.5
14600	2	M10	40	36.5	55	45	40	36	2
14601	2	M12	40	36.5	55	45	40	36	2
14602	2	M14	40	36.5	55	45	40	36	2
14603	2	M16	40	36.5	55	45	40	36	2
14604	2	M20	40	36.5	55	45	40	36	2
14605	2	M12	50	47.5	55	44	50	47	1.5
14606	2	M14	50	47.5	55	44	50	47	1.5
14607	2	M16	50	47.5	55	44	50	47	1.5
14608	2	M20	50	47.5	55	44	50	47	1.5
14609	2	M12	50	46.5	55	44	50	46	2
14610	2	M14	50	46.5	55	44	50	46	2
14611	2	M16	50	46.5	55	44	50	46	2
14612	2	M20	50	46.5	55	44	50	46	2
14795	2	M12	50	45.5	55	44	50	45	2.5
14796	2	M14	50	45.5	55	44	50	45	2.5
14797	2	M16	50	45.5	55	44	50	45	2.5
14798	2	M20	50	45.5	55	44	50	45	2.5
14830	2	M14	60	56.5	55	45	60	46	2
14831	2	M16	60	56.5	55	45	60	46	2
14832	2	M20	60	56.5	55	45	60	46	2

Support bases

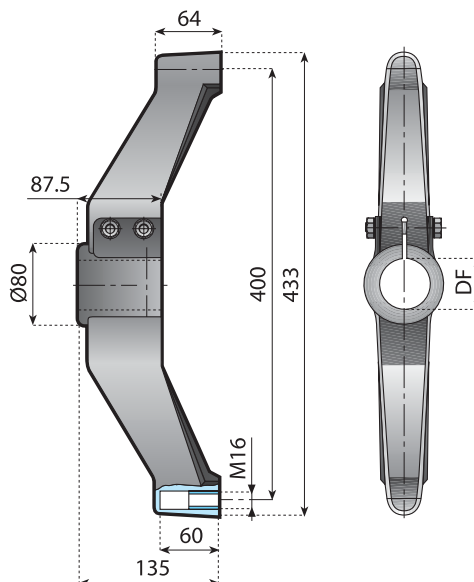

304 Stainless steel



Nickel plated brass



Polyamide



Zinc plated steel

- Cross ribs
- Improved load resistance
- Increased thickness
- Improved flex resistance


BIPODS

Material: reinforced polyamide threaded bushings and spacers in nickel plated brass.

Fasteners: see table on the right.

Packaging: 15 pieces.

Code	DF - for tube Ø		Fasteners
	mm	inch.	
15726	42.4	1.1/4	Zinc plated steel
15700	48.3	1.1/2	
15728	50.9	—	
15730	60.3	2	
15727	42.4	1.1/4	Stainless steel AISI 304
15725	48.3	1.1/2	
15729	50.9	—	
15731	60.3	2	

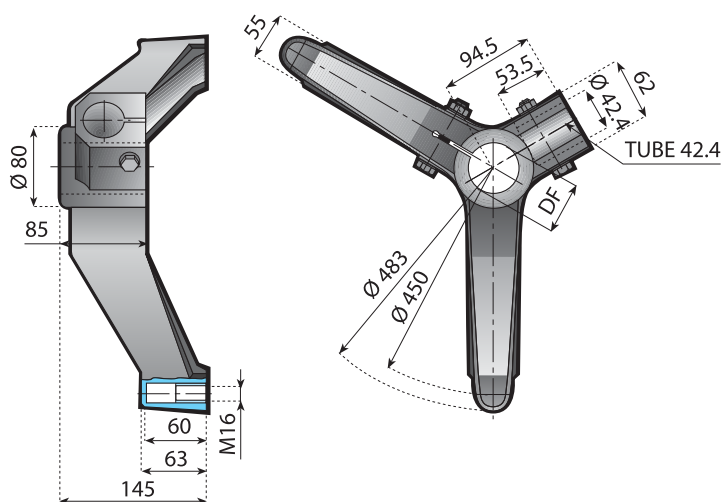

- Cross ribs
- Improved load resistance
- Increased thickness
- Improved flex resistance

BIPODS 120° WITH JOINT


Material: reinforced polyamide threaded bushings and spacers in nickel plated brass.

Fasteners: see table on the right.

Packaging: 15 pieces.

Code	DF - for tube Ø	
	mm	inch.
15335	48.3	1.1/2
15337	50.9	—
15339	60.3	2

Support bases

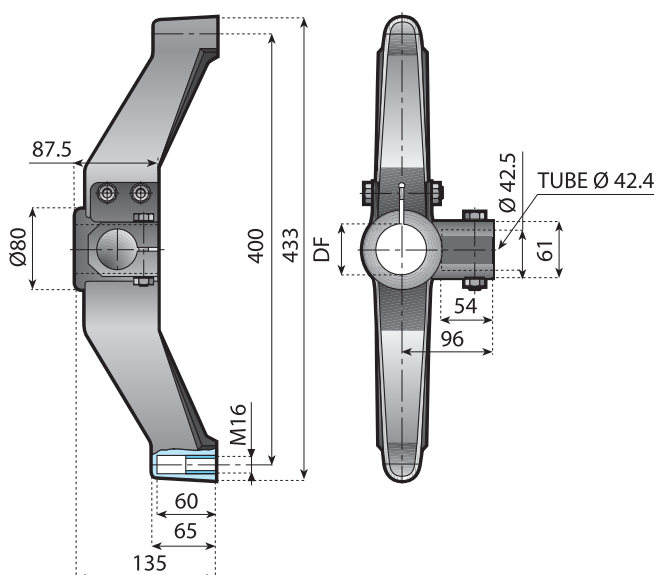

- **Cross ribs**
- **Improved load resistance**
- **Increased thickness**
- **Improved flex resistance**

BIPODS 180° WITH JOINT

Material: reinforced polyamide threaded bushings and spacers in nickel plated brass.

Fasteners: see table on the right.

Packaging: 15 pieces.

Code	DF - for tube Ø		Fasteners
	mm	inch.	
15701	48.3	1.1/2	Zinc plated steel
15735	50.9	–	
15737	60.3	2	
15732	48.3	1.1/2	Stainless steel AISI 304
15736	50.9	–	
15738	60.3	2	



304 Stainless steel




Nickel plated brass



Polvamide



Zinc plated steel

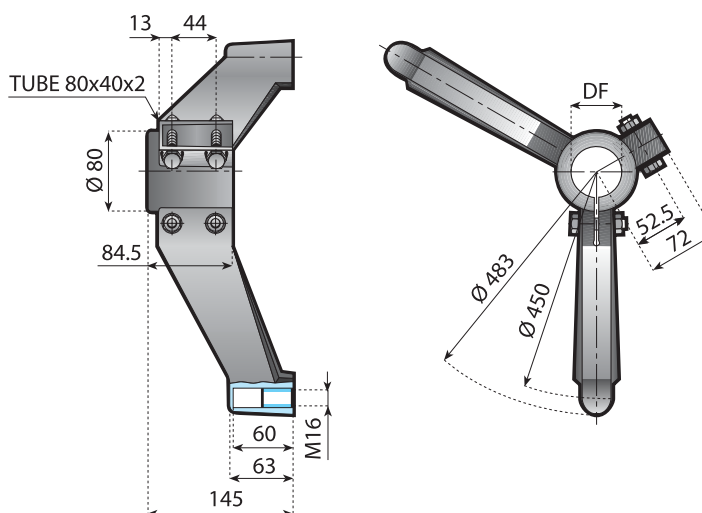

- **Cross ribs**
- **Improved load resistance**
- **Increased thickness**
- **Improved flex resistance**

BIPODS


Material: reinforced polyamide threaded bushings and spacers in nickel plated brass.

Fasteners: see table on the right.

Packaging: 15 pieces.

Code	DF - for tube Ø		Fasteners
	mm	inch.	
15704	42.4	1.1/4	Zinc plated steel
15508	48.3	1.1/2	
15817	50.9	–	
15512	60.3	2	
15705	42.4	1.1/4	Stainless steel AISI 304
15509	48.3	1.1/2	
15825	50.9	–	
15513	60.3	2	

Support bases

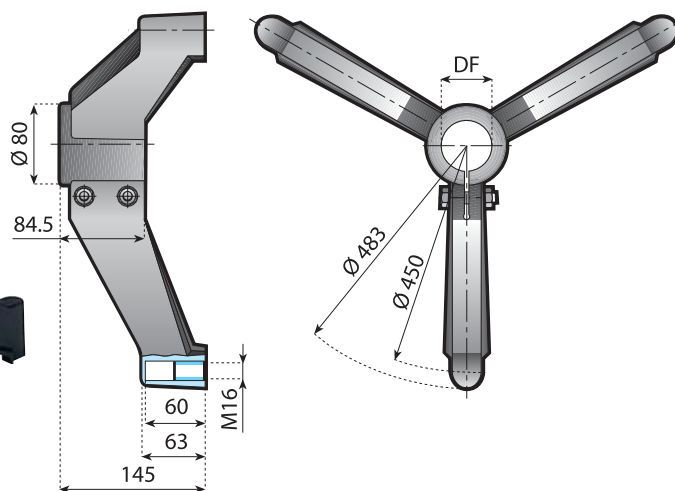

- Cross ribs
- Improved load resistance
- Increased thickness
- Improved flex resistance

TRIPODS

Material: reinforced polyamide threaded bushings and spacers in nickel plated brass.

Fasteners: see table on the right.

Packaging: 15 pieces.

Code	DF - for tube Ø		Fasteners
	mm	inch.	
15702	42.4	1.1/4	Zinc plated steel
15506	48.3	1.1/2	
15818	50.9	–	
15510	60.3	2	
15703	42.4	1.1/4	Stainless steel AISI 304
15507	48.3	1.1/2	
15826	50.9	–	
15511	60.3	2	



304 Stainless steel




Nickel plated brass



Polyamide



Zinc plated steel

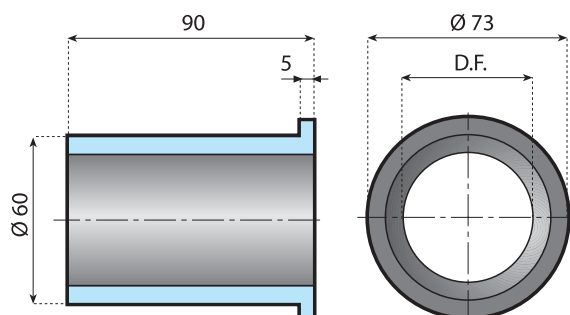

Code	DF - for tube Ø	
	mm	inch.
15204	50.9	–
15205	48.3	1.1/2
15206	42.4	1.1/4
15207	50	–

REDUCTION BUSH

Material: polyamide

Packaging: 25 pieces.

Support bases



304 Stainless steel



Nickel plated brass



Polyamide

- Reinforced design
- Completely closed structure
easier to clean and to disinfect



COMPLETELY CLOSED VERSION

This split version permits a better clamping of both round and square tubes.
Each bipod is supplied complete with ultrasonic welded protection coverings, which prevent dirt, dust or liquid infiltration in the lower part of the base.


SPLIT BIPODS

Material: reinforced polyamide threaded bushings in nickel plated brass fasteners in stainless steel AISI 304.

Packaging: 15 pieces.

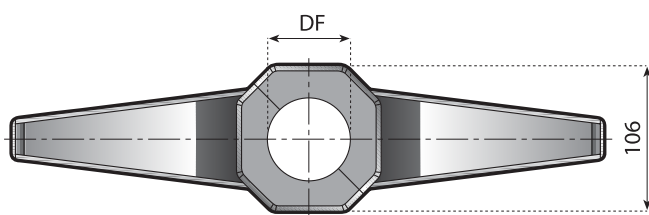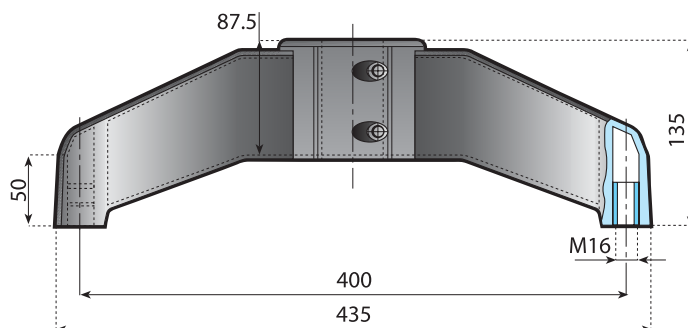

Code	DF - for tube Ø	
	mm	inch.
15502	48.3	1.1/2
15501	60.3	1.1/4

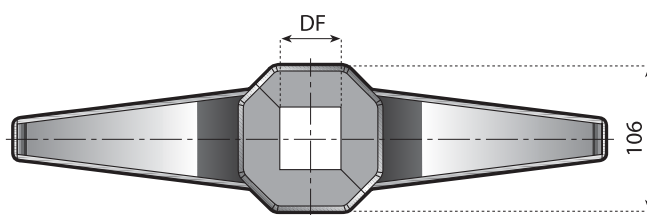

Code	DF - for square tube	
	mm	inch.
15499	45x45	–
15500	50x50	2.38x2.38

Articulated feet



304 Stainless steel




Nickel plated brass



Polyamide



Zinc plated steel

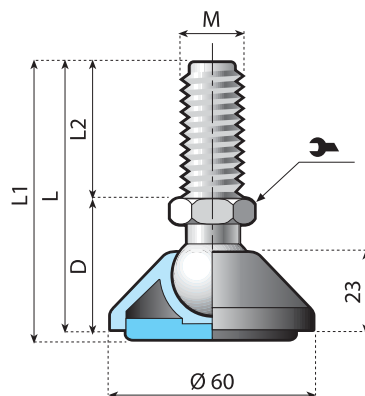


D60

Code	Code	Spindle	Nut								
Standard	Antivibration	Type	Material	material	D		M	L	L ¹	L ²	
17514	17714	3	PA.FE	FE.ZN	54	24	16	104	107	50	4000
17515	17715	3	PA.FE	S/S	54	24	16	104	107	50	10000
17517	17722	11	OT.NI	S/S	44	20	16	99	102	55	10000
17519	17523	1	S/S 304	S/S	51	24	16	107	110	56	10000
17524	17525	1	S/S 304	S/S	51	24	16	156	159	105	10000
17766	17767	2	S/S 304	S/S	42	24	16	99	102	57	15000
17768	17769	2	S/S 304	S/S	42	24	16	157	160	115	15000

ARTICULATED FOOT

Material: pad in polyamide, spindle and nut as in the table, antivibration version with oil resistant rubber hardness 70 shore.

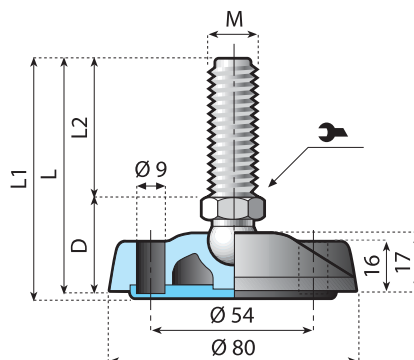

D80


Code	Code	Spindle	Nut								
Standard	Antivibration	Type	Material	material	D		M	L	L ¹	L ²	
17540	17549	11	FE.ZN	FE.ZN	28	13	16	98	101	70	10000
17541	17550	11	FE.ZN	FE.ZN	28	13	16	148	151	120	10000
17560	17570	11	S/S 304	S/S	28	13	16	98	101	70	10000
17561	17571	11	S/S 304	S/S	28	13	16	148	151	120	10000

ARTICULATED FOOT

Material: pad in polyamide, spindle and nut as in the table, antivibration version with oil resistant rubber hardness 70 shore.

S/S = STAINLESS STEEL AISI 304
FE.ZN = ZINC PLATED STEEL • = WITHOUT NUT
OT.NI = NICKEL PLATED BRASS
PA.FE = POLYAMIDE WITH STEEL INSERT
STANDARD VERSION = WITHOUT RUBBER
ANTIVIBRATION VERSION = WITH RUBBER

STATED LOAD VALUES ARE MEANT FOR STATIC CONDITIONS. SUCH VALUES HAVE TO BE ADEQUATELY REDUCED IN PRESENCE OF HIGH FREQUENCY VIBRATIONS OR DYNAMIC LOADS. FOR FURTHER INFORMATION CONTACT OUR TECHNICAL OFFICE.



Articulated feet



304 Stainless steel




Nickel plated brass



Polyamide



Zinc plated steel

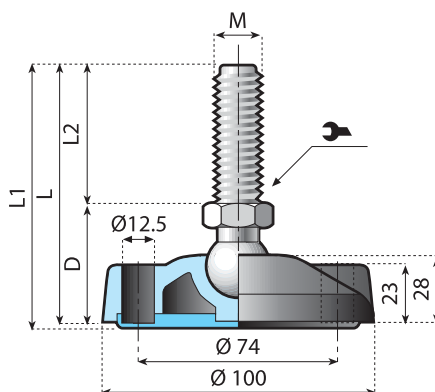


D100

ARTICULATED FOOT

Material: pad in polyamide, spindle and nut as in the table, antivibration version with oil resistant rubber hardness 70 shore.

Code	Code	Spindle		Nut		D		M	L	L ¹	L ²	
Standard	Antivibration	Type	Material	material								
17629	17645	1				58	24	16	113	116	55	12000
17630	17646	1	S/S 304	•		58	24	16	163	166	105	12000
17782	17783	2				46	24	16	103	106	57	18000
17784	17785	2	S/S 304	•		46	24	16	161	164	115	18000

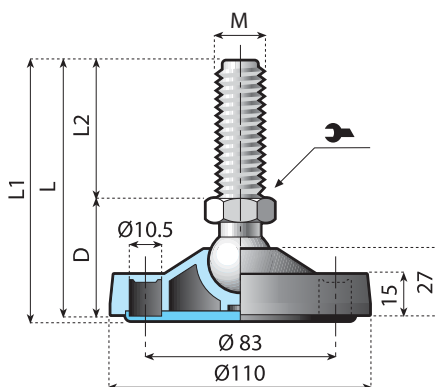

D110

ARTICULATED FOOT

Material: pad in polyamide, spindle and nut as in the table, antivibration version with oil resistant rubber hardness 70 shore.

Code	Code	Spindle		Nut		D		M	L	L ¹	L ²	
Standard	Antivibration	Type	Material	material								
17528	17456	1				55	24	16	110	113	55	12000
17520	17458	1	S/S 304	S/S		55	24	16	160	163	105	12000
17363	17367	1				55	24	16	206	209	151	12000
17710	17711	2				46	24	16	103	107	57	18000
17712	17713	2	S/S 304	S/S		46	24	16	161	165	115	18000
17717	17718	2				46	24	16	191	195	145	18000

FOR FURTHER INFORMATION
ABOUT THIS LINE PLEASE
CONSULT THE PRESSO-LINE
CATALOGUE.

